

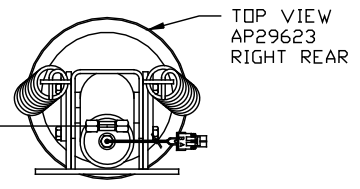

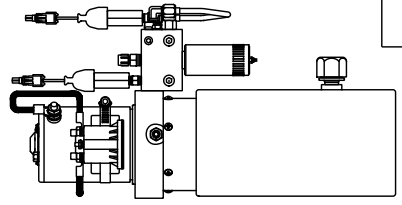



ORIENTATION
 ← FRONT

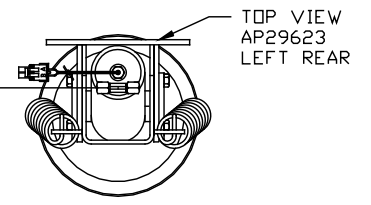

NOTE: HOSES ARE OEM PROVIDED.

CROSS-TIES REQUIRED FOR
 STRAIGHT-ACTING JACKS
 ON BOTH FRONT AND REAR.

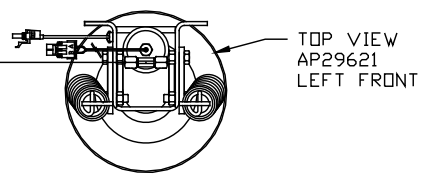

LOCATION AND ORIENTATION OF
 PUMP/MANIFOLD ASSEMBLY WILL
 DIFFER DEPENDING UPON O.E.M.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE
 STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

LEVELING SYSTEM: AP43261

NO.	DATE	REVISION

THE INFORMATION DISCLOSED ON THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE HWH CORPORATION

HWH			I-80 EXIT 267 SOUTH RT 1 MOSCOW, IOWA 52760		
SCALE 1:6	DATE 31JUL08	DRAWN BY .			
HYD CONN DIAGRAM					
BORN FREE				DRAWING NUMBER MP70034	