


ORIENTATION
FRONT

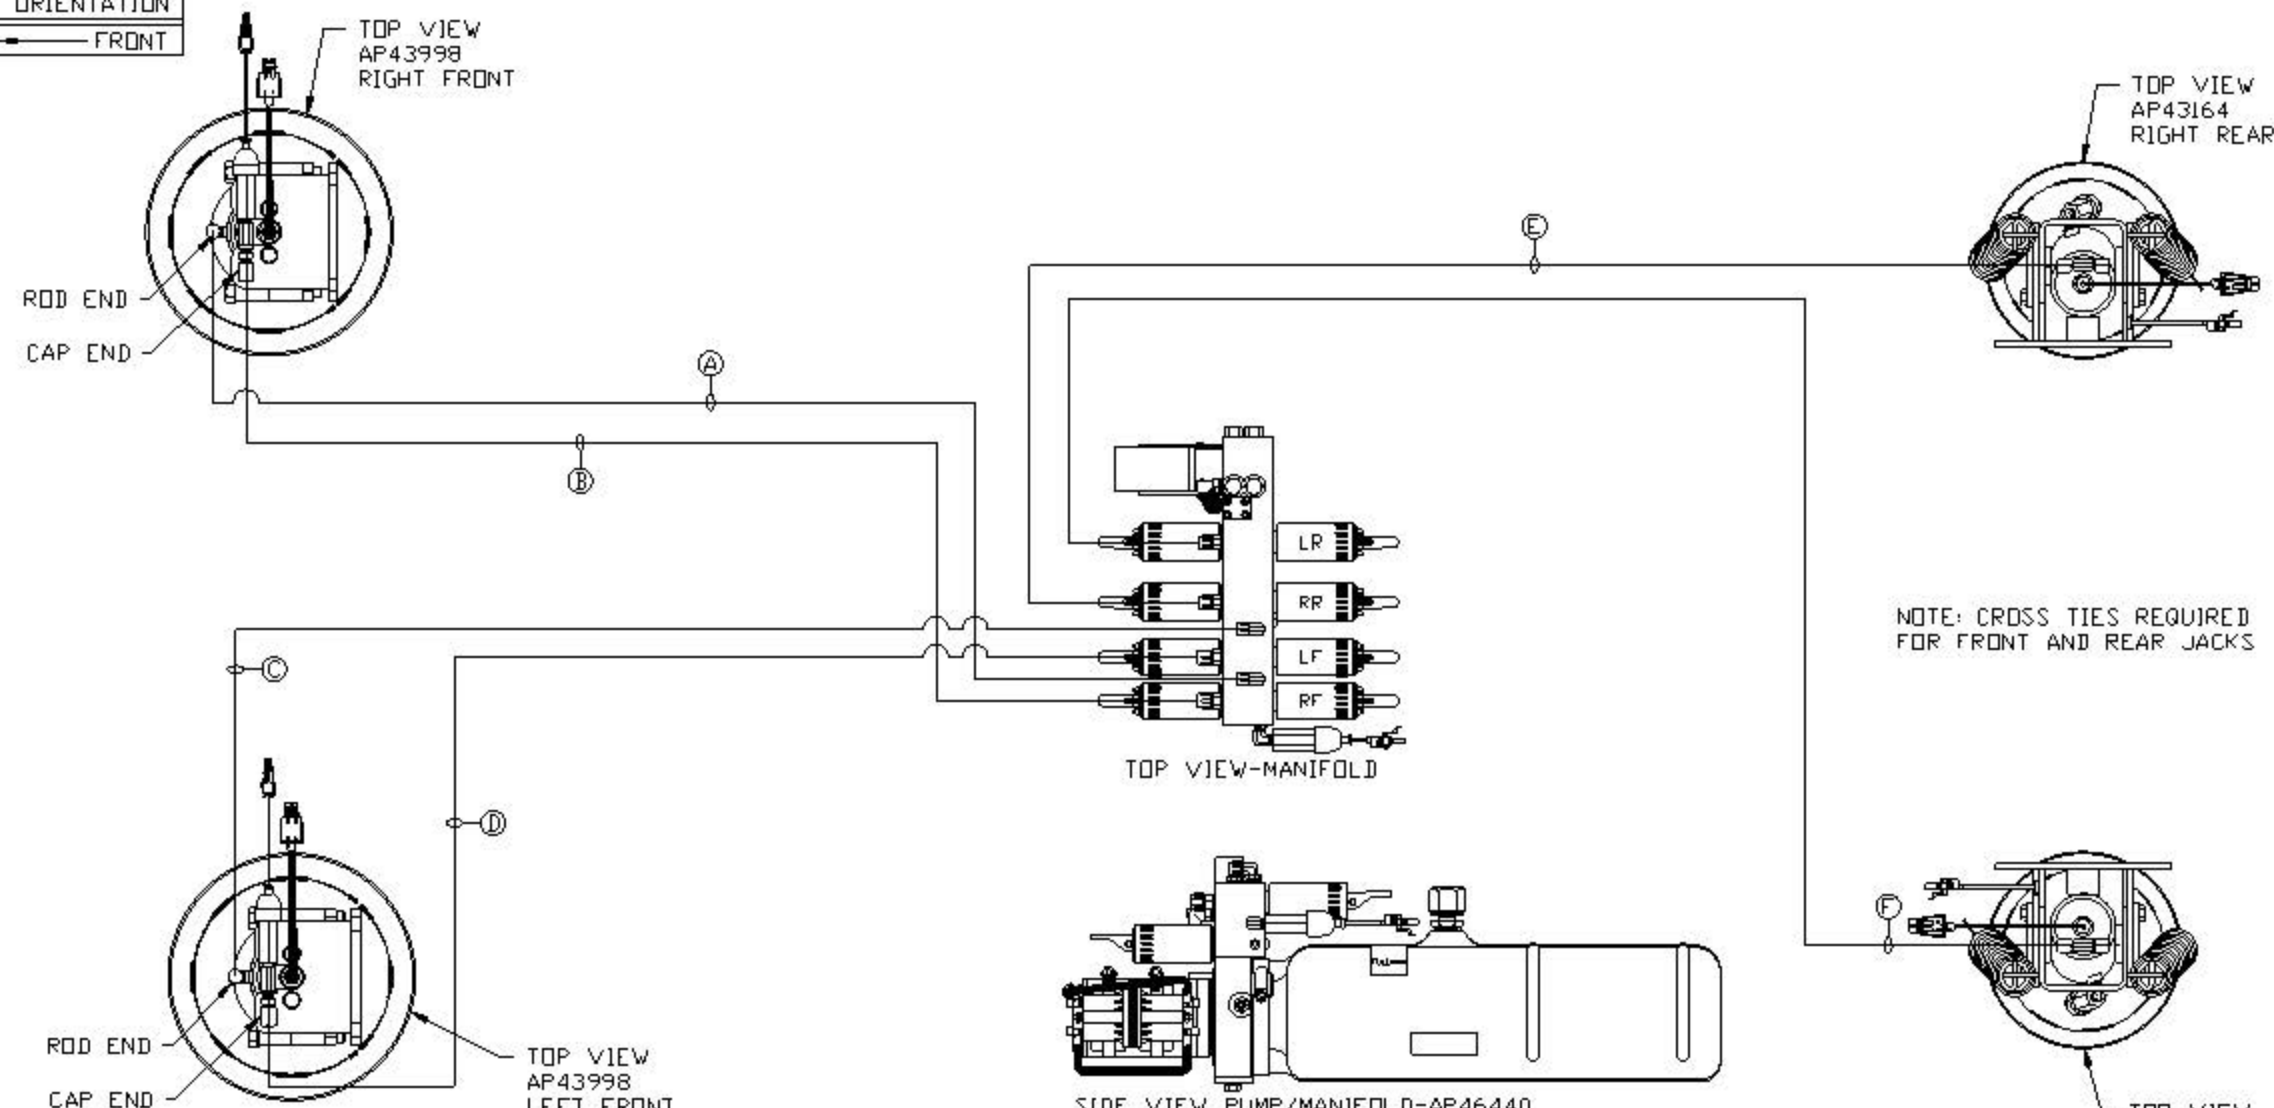

- Ⓐ AP7131 HOSE ASSY .25" X 496' - RF ROD END
- Ⓑ AP44662 HOSE ASSY .25/05 X 456' - RF CAP END
- Ⓒ AP4164 HOSE ASSY .25" X 384' - LF ROD END
- Ⓓ AP46312 HOSE ASSY .25/05 X 372' - RF CAP END
- Ⓔ AP4061 HOSE ASSY .25" X 216' - RR CAP END
- Ⓕ AP5384 HOSE ASSY .25" X 116' - LR CAP END

SIDE VIEW PUMP/MANIFOLD-AP46440

LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON O.E.M.

NOTE: CROSS TIES REQUIRED FOR FRONT AND REAR JACKS

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

LEVELING SYSTEM: AP51463

NO.	DATE	REVISION

HWH I-80 EXIT 267 SOUTH
RT 1 MOSCOW, IOWA 52760

SCALE 1:6 DATE 19FEB13 DRAWN BY .

HYD CONN DIAGRAM

ROLLINGSTAR DRAWING NUMBER MP70619

THE INFORMATION DISCLOSED ON THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE HWH CORPORATION