


ORIENTATION

← FRONT

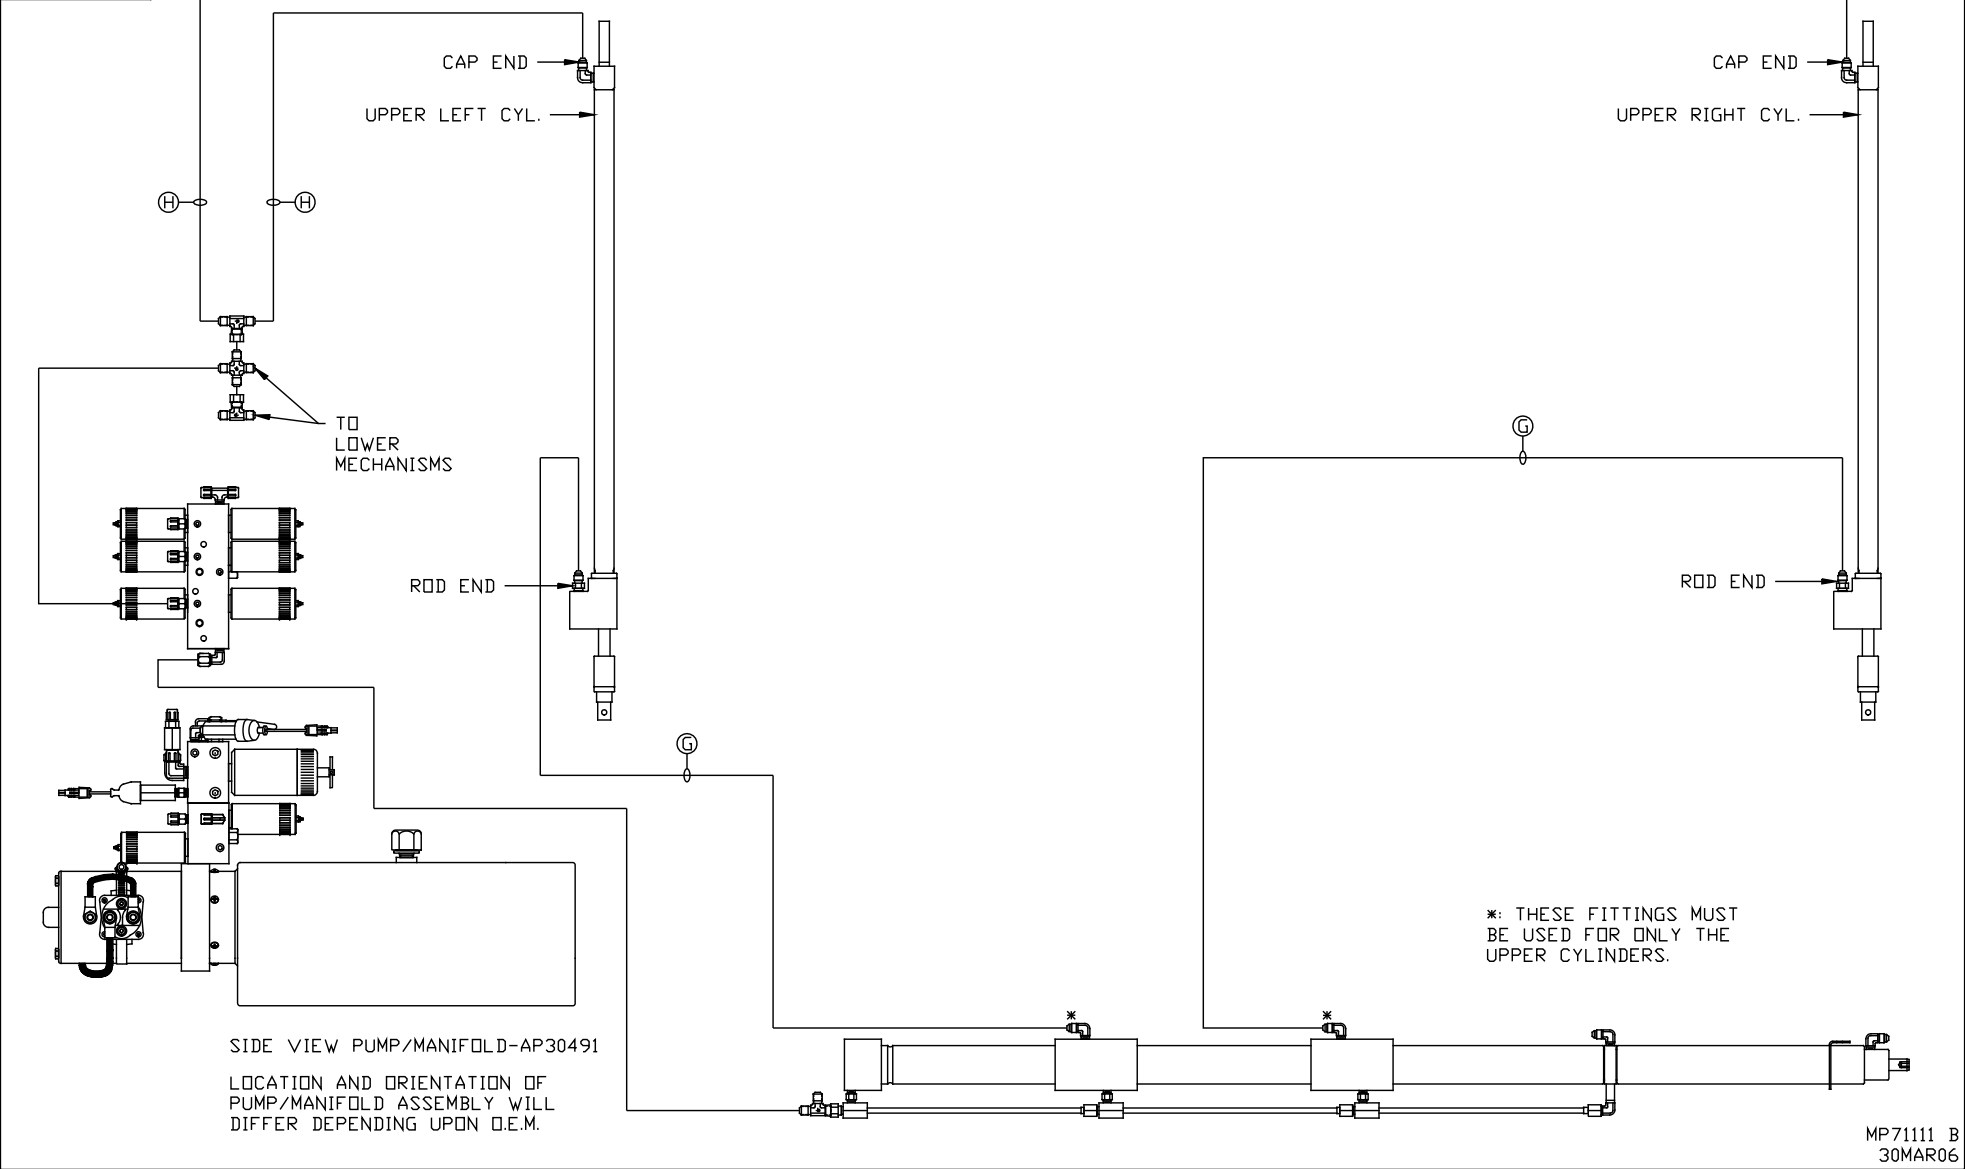

SIDE VIEW PUMP/MANIFOLD-AP30491
LOCATION AND ORIENTATION OF
PUMP/MANIFOLD ASSEMBLY WILL
DIFFER DEPENDING UPON O.E.M.

*: THESE FITTINGS MUST
BE USED FOR ONLY THE
UPPER CYLINDERS.

- Ⓐ AP5352 HOSE ASSY .25 x 96"
ROD END - ALWAYS PRESSURIZED
- Ⓑ AP5965 HOSE ASSY .25 x 180"
CAP END
- Ⓒ AP5384 HOSE ASSY .25 x 116"
ROD END - ALWAYS PRESSURIZED
- Ⓓ AP27602 HOSE ASSY .25 x 186"
CAP END
- Ⓔ AP24668 HOSE ASSY HWH02HP x 324"
ROD END - ALWAYS PRESSURIZED
HOSES MUST BE HIGH PRESSURE
HOSES OF EQUAL LENGTH AND DIAMETER
- Ⓕ AP4312 HOSE ASSY HWH02HP x 378"
CAP END - HOSES MUST MAINTAIN
EQUAL LENGTH AND DIAMETER
- Ⓖ AP36651 HOSE ASSY HWH02HP x 480"
ROD END - ALWAYS PRESSURIZED
HOSES MUST BE HIGH PRESSURE
HOSES OF EQUAL LENGTH AND DIAMETER
- Ⓗ AP34187 HOSE ASSY .25 x 588"
CAP END - HOSES MUST MAINTAIN
EQUAL LENGTH AND DIAMETER

NOTE: G HOSE ON FIRST COACH IS AP24653 02HP X 204"

NOTE: H HOSE ON FIRST COACH IS AP13851 .25 X 318"