



ORIENTATION
FRONT

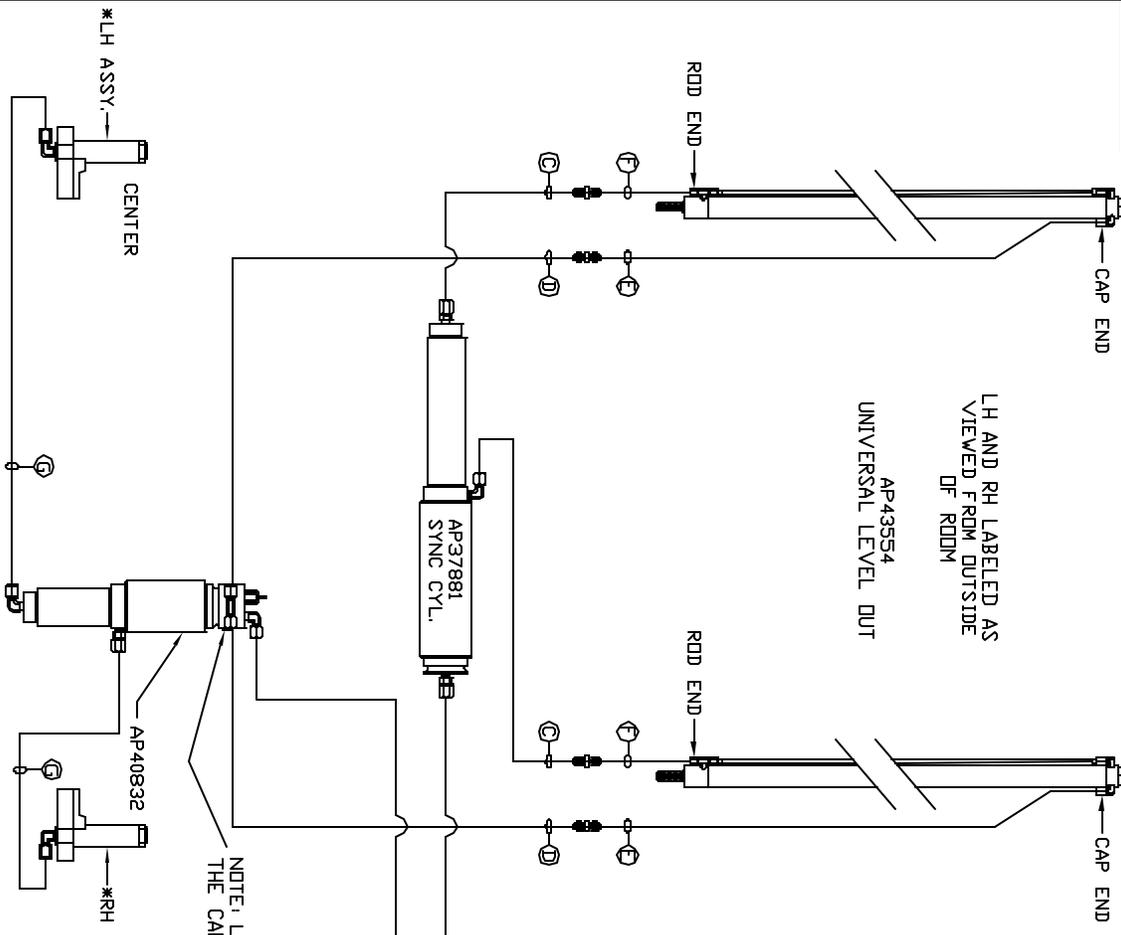

- * PART OF THE ROOM EXTENSION MECHANISM.
- ① .25" ID HOSE - ALWAYS PRESSURIZED
- ② .25" ID HOSE - ALWAYS PRESSURIZED
- ③ .25" ID HOSE - ALWAYS PRESSURIZED - MUST BE HIGH PRESSURE HOSES OF EQUAL LENGTH AND DIAMETER
- ④ .125" ID HOSE - ALWAYS PRESSURIZED - MUST BE HIGH PRESSURE HOSES OF EQUAL LENGTH AND DIAMETER
- ⑤ .125" ID HOSE - MUST MAINTAIN EQUAL LENGTH AND DIAMETER

- NOTE: HOSES ⑥ AND ⑦ ARE INCLUDED WITH THE ROOM EXTENSION MECHANISM.
- ⑥ AP24818 HOSE ASSY HW102HP x 86' CAP END - MUST MAINTAIN EQUAL LENGTH AND DIAMETER
- ⑦ AP24632 HOSE ASSY HW102HP x 48' ROD END - ALWAYS PRESSURIZED - MUST BE HIGH PRESSURE HOSES OF EQUAL LENGTH AND DIAMETER
- ⑧ .125" ID HOSE - MUST BE HIGH PRESSURE HOSES OF EQUAL LENGTH AND DIAMETER

NOTE: LIFT SYNC MUST BE MOUNTED WITH THE CAP END POINTING UP.

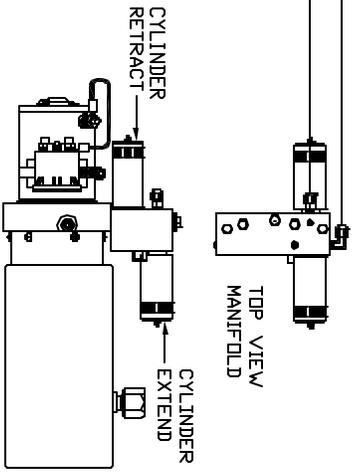

SIDE VIEW PUMP/MANIFOLD-AP32369
LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON O.E.M.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RIVA STANDARDS, AND OTHER APPLICABLE STANDARDS.

CONTROL PACKAGE: AP32883

NO.	DATE	REVISION

HW H	1-80 EXT 267 SOUTH
RT 1 MOSCOW, IDVA 52760	
SCALE 1:6	DATE 03DCT08
HYD CONN DIAGRAM	DRAWING NUMBER
NOMAD	MP70060