



ORIENTATION
FRONT

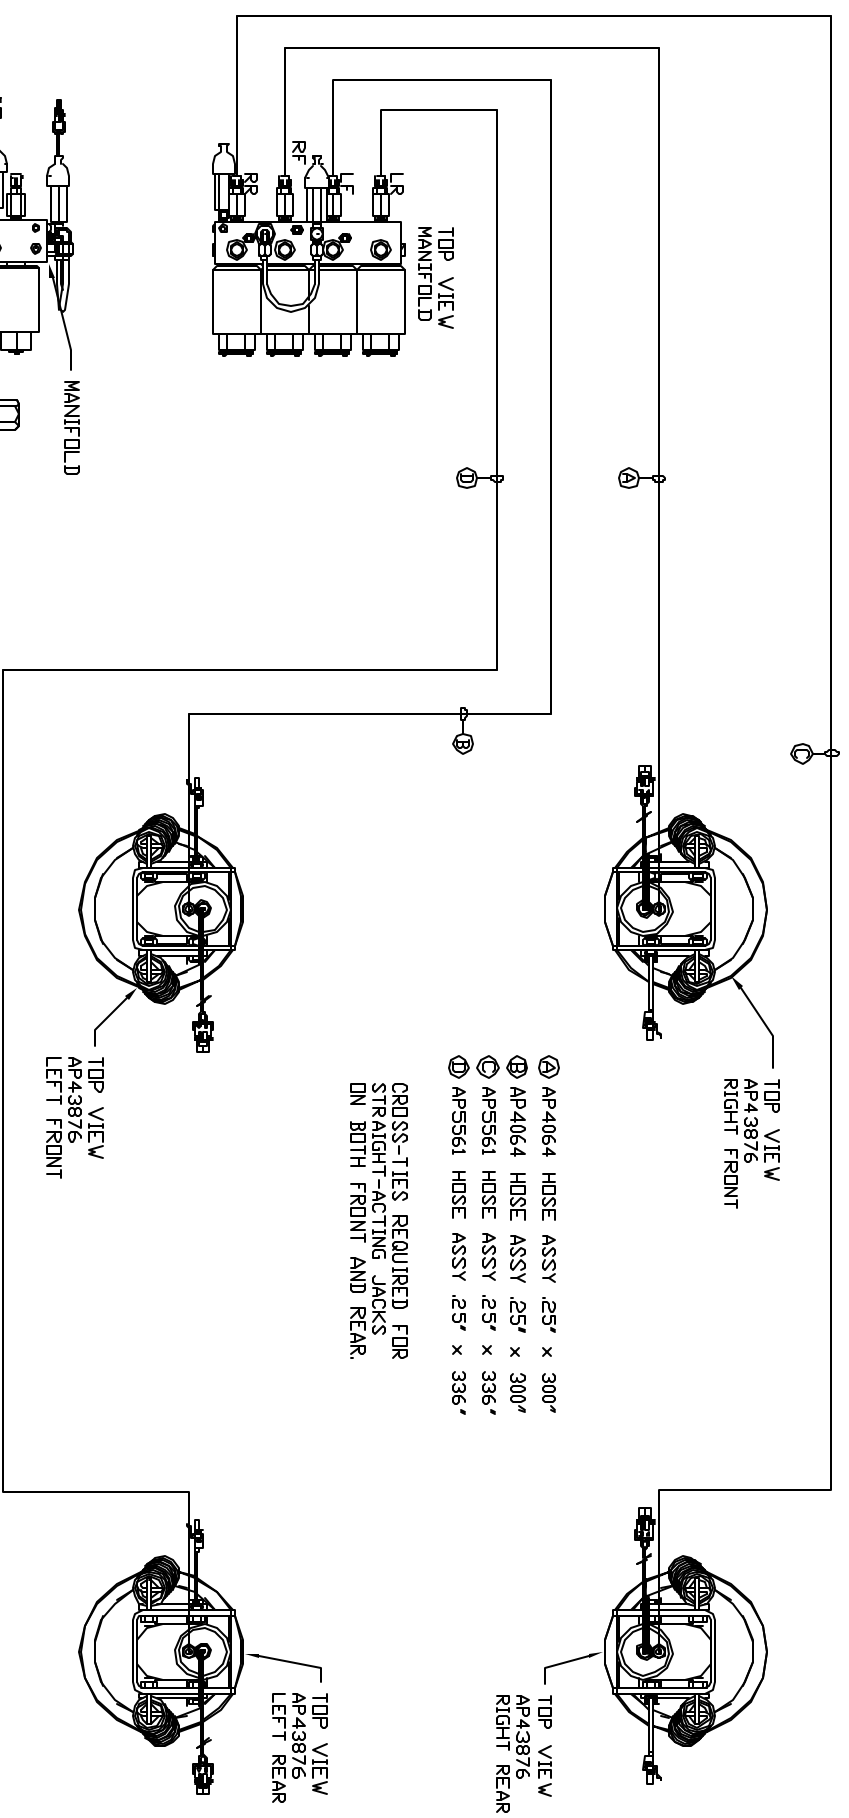

- Ⓐ AP4064 HOSE ASSY .25' x 300"
 - Ⓑ AP4064 HOSE ASSY .25' x 300"
 - Ⓒ AP5561 HOSE ASSY .25' x 336"
 - Ⓓ AP5561 HOSE ASSY .25' x 336"
- CROSS-TIES REQUIRED FOR STRAIGHT-ACTING JACKS ON BOTH FRONT AND REAR.

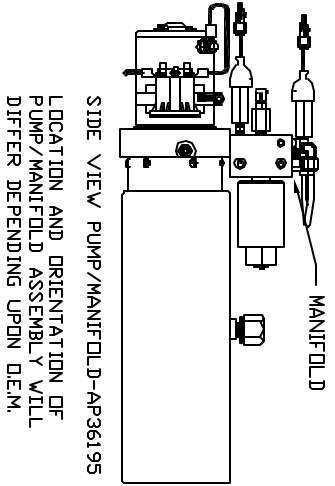

SIDE VIEW PUMP/MANIFOLD-AP36195
LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON O.E.M.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

LEVELING SYSTEM AP50941

NO.	DATE	REVISION

THE INFORMATION DISCLOSED IN THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE RVH CORPORATION

HWH 1-80 EXIT 267 SOUTH
 RT 1 MOSCOW, IDWA 52760
 SCALE 1:6 DATE 16AUG13 DRAWN BY .
HYD CONN DIAGRAM
LDS SYSTEMS DRAWING NUMBER MP70648