


ORIENTATION  
FRONT

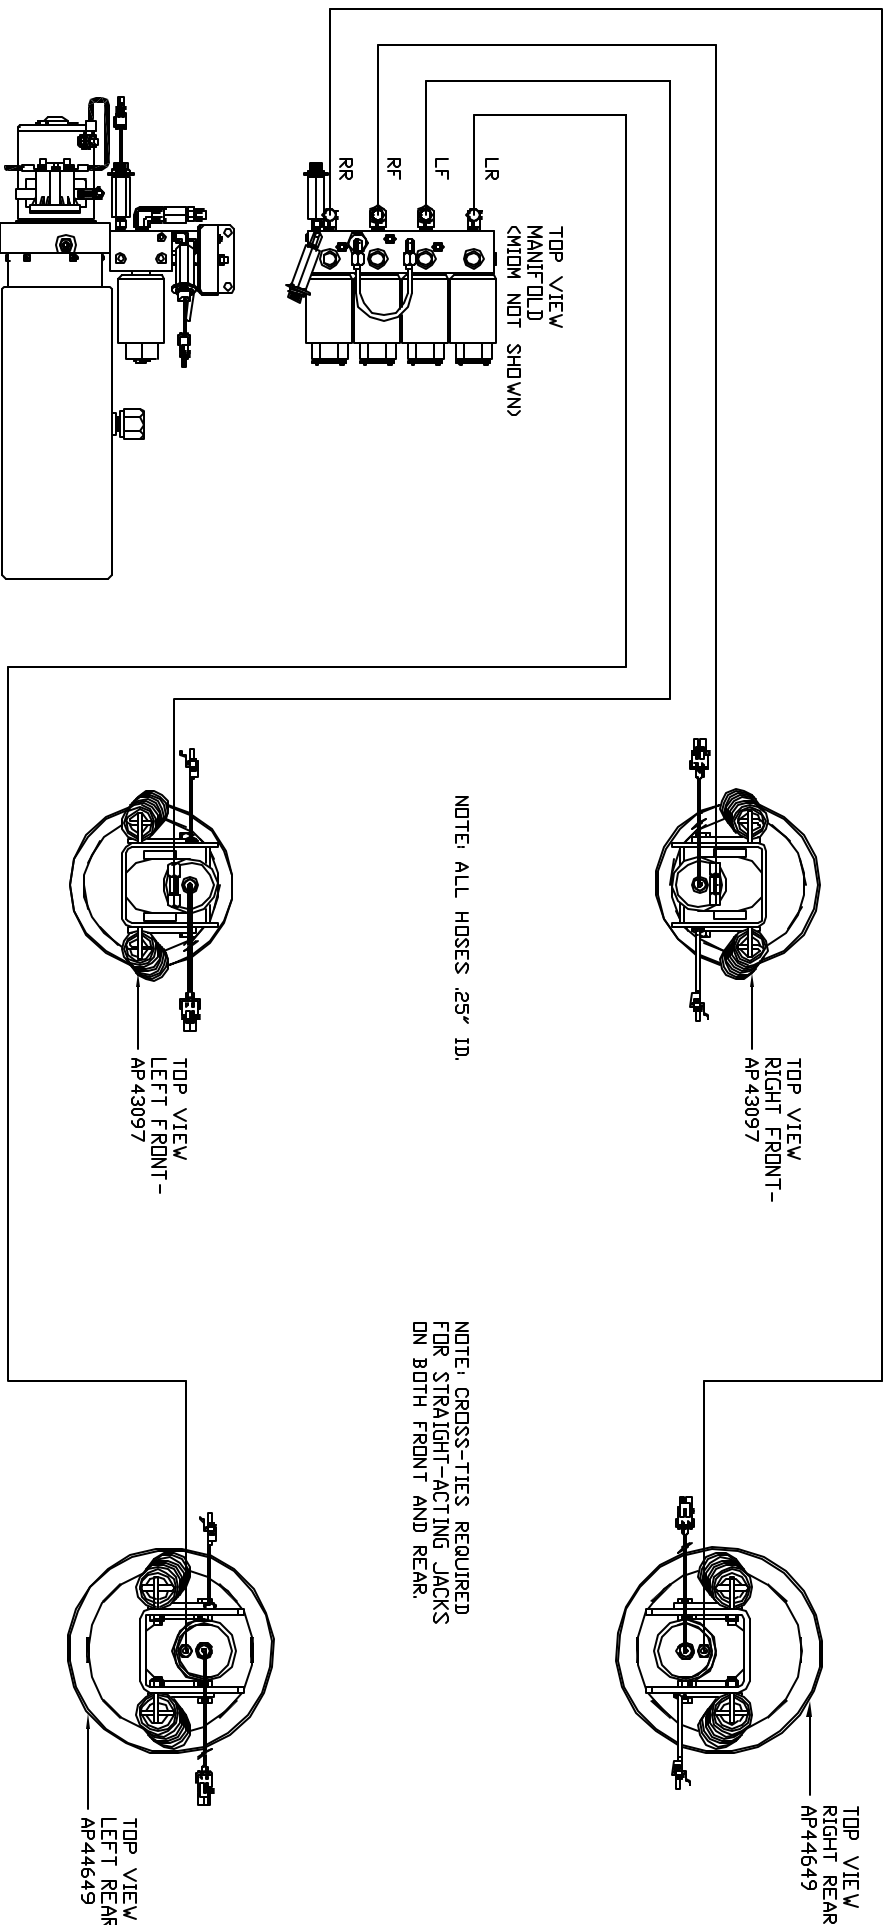

NOTE: ALL HOSES .25" ID.

NOTE: CROSS-TIES REQUIRED FOR STRAIGHT-ACTING JACKS ON BOTH FRONT AND REAR.

SIDE VIEW PUMP/MANIFOLD-AP48041  
 LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON OEM.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RYLA STANDARDS, AND OTHER APPLICABLE STANDARDS.

LEVELING SYSTEM: AP51924

| NO. | DATE | REVISION |
|-----|------|----------|
|     |      |          |
|     |      |          |
|     |      |          |

|                  |   |
|------------------|---|
| HW H             | 1-80 EXT 267 SOUTH<br>RT 1 MOSCOV, IOWA 52760 |
| SCALE 1:6        | DATE 10DEC13                                  |
| DRAWN BY .       |   |
| HYD CONN DIAGRAM |   |
| ZIVKD            | DRAWING NUMBER<br>MP70731                     |

THE INFORMATION DISCLOSED IN THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE INH CORPORATION