


- Ⓐ HOSE ASSY .25" ID
ROD END - ALWAYS PRESSURIZED
- Ⓑ HOSE ASSY .25" ID
CAP END
- Ⓒ HOSE ASSY .125" ID OR .03
ROD END - ALWAYS PRESSURIZED
HOSES MUST MAINTAIN EQUAL
LENGTH AND DIAMETER
- Ⓓ HOSE ASSY .25" ID
CAP END - HOSES MUST MAINTAIN
EQUAL LENGTH AND DIAMETER
- Ⓔ AP24632 HOSE ASSY HW/H02HP x 48"
ROD END - ALWAYS PRESSURIZED -
HOSES MUST MAINTAIN EQUAL
LENGTH AND DIAMETER
- Ⓕ AP24818 HOSE ASSY HW/H02HP x 86"
CAP END - MUST MAINTAIN EQUAL
LENGTH AND DIAMETER

NOTE: HOSES **(E)** AND **(F)** ARE INCLUDED WITH THE ROOM EXTENSION MECHANISM

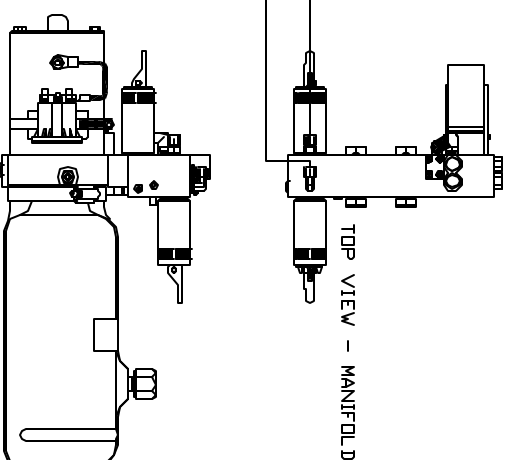

	HWH I-80 EXIT 267 SOUTH RT 1 MOSCOW, IDWA 52760		
	SCALE 1:6	DATE 27FEB14	DRAWN BY .
NO.	DATE	REVISION	
HYD CONN DIAGRAM			

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

CONTROL PACKAGE! AP53200

THE INFORMATION DISCLOSED ON THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE HNH CORPORATION

FUSION

DRAWING NUMBER
MP70763