
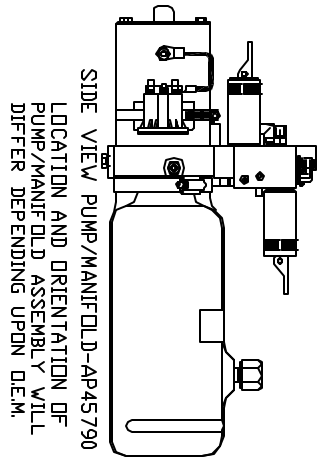


- Ⓐ HOSE ASSY .25" ROD END - ALWAYS PRESSURIZED
- Ⓑ HOSE ASSY .25" CAP END
- Ⓒ HOSE ASSY HVH02HP DR 03 ROD END - ALWAYS PRESSURIZED - MUST MAINTAIN EQUAL LENGTH AND DIAMETER
- Ⓓ HOSE ASSY .25" CAP END - MUST MAINTAIN EQUAL LENGTH AND DIAMETER

- Ⓔ AP24818 HOSE ASSY HVH02HP X 86" CAP END - MUST MAINTAIN EQUAL LENGTH AND DIAMETER
- Ⓕ AP24632 HOSE ASSY HVH02HP X 48" ROD END - ALWAYS PRESSURIZED - MUST MAINTAIN EQUAL LENGTH AND DIAMETER

NOTE: HOSES Ⓔ AND Ⓕ ARE INCLUDED WITH THE ROD EXTENSION MECHANISM.

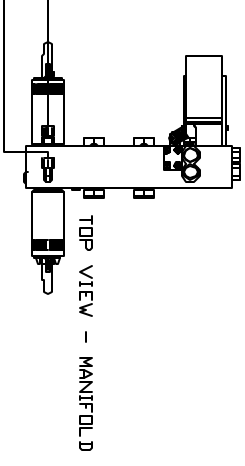

LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON DEM.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RYLA STANDARDS, AND OTHER APPLICABLE STANDARDS.

CONTROL PACKAGE: AP50674

NO.	DATE	REVISION
Δ	06MAY15	CORRECTED ROD/CAP SIDE

HW H 1-80 EXIT 267 SOUTH
 RT 1 MOSCOW, IDVA 52760
 SCALE 1:6 DATE 15AUG12 DRAWN BY .
HYD CONN DIAGRAM
 EVI DRAWING NUMBER MP70583

THE INFORMATION DISCLOSED IN THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE IAH CORPORATION