



FRONT VIEW - AP53866

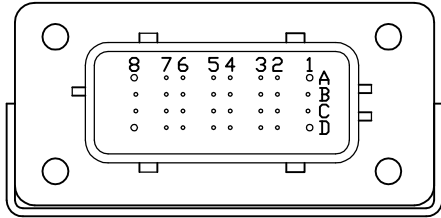

PIN

- A1. BLK(W7500) - SYSTEM LATCH
- A2. YELLOW - CAN HIGH
- A3. N/C
- A4. N/C
- A5. BLK(W2000) - RIGHT FRONT JACK WARNING SWITCH
- A6. BLK(W2200) - RIGHT FRONT JACK PRESSURE SWITCH
- A7. BLK(W3200) - RIGHT REAR JACK PRESSURE SWITCH
- A8. BLK(W8101) - 50 LB. PRESSURE SWITCH
- B1. RED(W6800) - TOUCH PANEL POWER
- B2. GREEN - CAN LOW
- B3. WHT(W6230) - TOUCH PANEL GROUND
- B4. N/C
- B5. BLK(W3000) - RIGHT REAR JACK WARNING SWITCH
- B6. BLK(W4200) - LEFT REAR JACK PRESSURE SWITCH
- B7. BLK(W8601) - NOT USED
- B8. BLK(W8100) - 3000 LB. PRESSURE SWITCH
- C1. RED(W6121) - LEVEL SENSOR POWER
- C2. CAN SHIELD
- C3. WHT(W6231) - LEVEL SENSOR GROUND
- C4. BLK(W0400) - REAR SENSE
- C5. BLK(W4000) - LEFT REAR WARNING SWITCH
- C6. N/C
- C7. N/C
- C8. BLK(W0300) - RIGHT SIDE SENSE
- D1. RED(W6120) - ACCESSORY
- D2. WHT(W6235) - WARNING SWITCH GROUND
- D3. N/C
- D4. BLK(W1000) - LEFT FRONT JACK WARNING SWITCH
- D5. BLK(W1200) - LEFT FRONT JACK PRESSURE SWITCH
- D6. BLK(W0100) - LEFT SIDE SENSE
- D7. BLK(W0200) - FRONT SENSE
- D8. BLK(W9000) - PARK BRAKE


NOTE: WIRE NUMBERS ON THIS SHEET ARE REFERENCED TO HARNESS PLUGS.

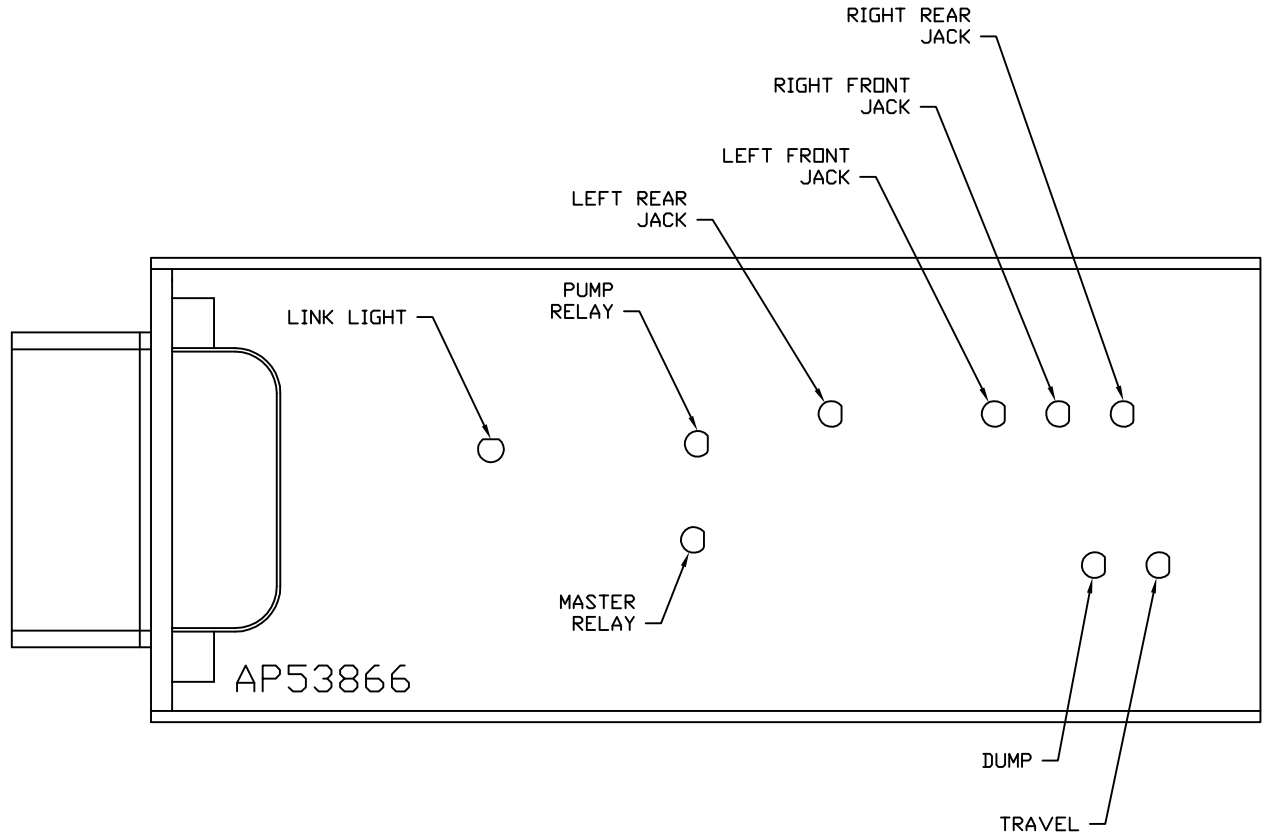

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.


			HWH			I-80 EXIT 267 SOUTH RT 1 MOSCOW, IOWA 52760		
			SCALE 1:3	DATE 05MAR15	DRAWN BY .			
			SYSTEM SCHEMATIC ELEC					
1	10MAR15	ADDED DETAIL D						
NO.	DATE	REVISION						
THE INFORMATION DISCLOSED ON THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE HWH CORPORATION						DRAWING NUMBER MP91115 A/E		

FRONT VIEW - AP52771

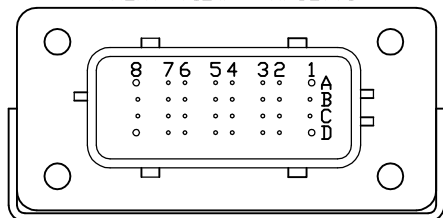


- PIN
- A1. BLACK - N/C
  - A2. YELLOW - CAN HIGH
  - A3. N/C
  - A4. N/C
  - A5. BLK(W5700) - ROOM 1 OUT LIMIT SWITCH
  - A6. BLK(W5000) - ROOM 1 EXTEND
  - A7. BLK(W5100) - ROOM 1 RETRACT
  - A8. BLACK - N/C
  - B1. N/C
  - B2. GREEN - CAN LOW
  - B3. N/C
  - B4. N/C
  - B5. N/C
  - B6. N/C
  - B7. N/C
  - B8. N/C
  - C1. BLK(W7500) - SYSTEM LATCH
  - C2. CAN SHIELD
  - C3. N/C
  - C4. N/C
  - C5. N/C
  - C6. N/C
  - C7. N/C
  - C8. N/C
  - D1. BLK(W6876) - SYSTEM WAKE UP
  - D2. WHT(W6235) - LIMIT SWITCH GROUND
  - D3. N/C
  - D4. BLK(W5703) - ROOM 1 IN LIMIT SWITCH
  - D5. N/C
  - D6. N/C
  - D7. N/C
  - D8. BLACK - N/C

NOTE: WIRE NUMBERS ON THIS SHEET ARE REFERENCED TO HARNESS PLUGS.

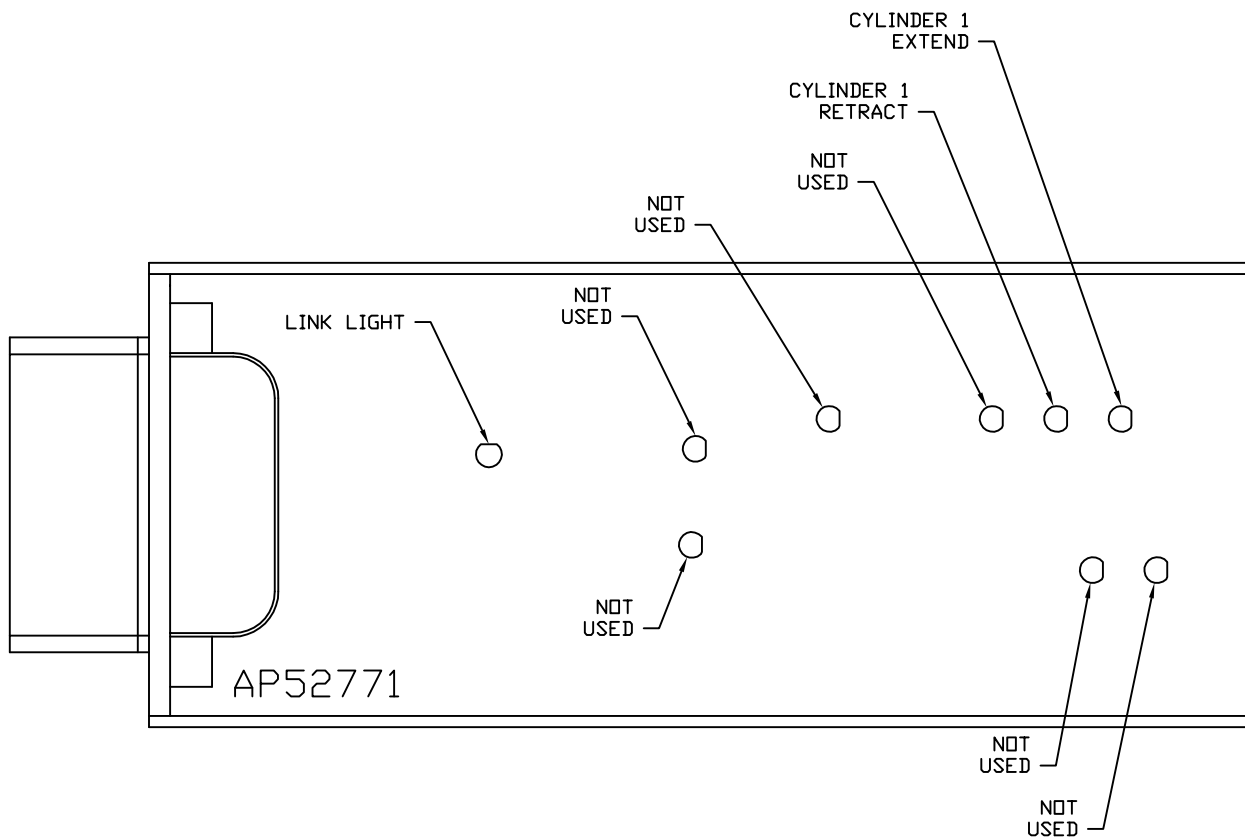


NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.



DETAIL A

- PIN
1. N/C
  2. N/C
  3. N/C
  4. N/C
  5. BLK(W7699) WARNING LED/ALARM CONTROL
  6. N/C





DETAIL A

- PIN
- 1 YELLOW CAN HI
  - 2 GREEN CAN LOW
  - 3 CAN SHIELD
  - 4 WHT(W6230) GROUND
  - 5 RED(W6800) POWER

120 OHM  
TERMINATION  
RESISTOR

TO OEM PROVIDED  
PILOT DUMP CONNECTION

- 1
- 
- PIN
1. BLK(W9300) DUMP
  2. BLK(W9301) TRAVEL
  3. WHT(W6230) GROUND
  4. N/C

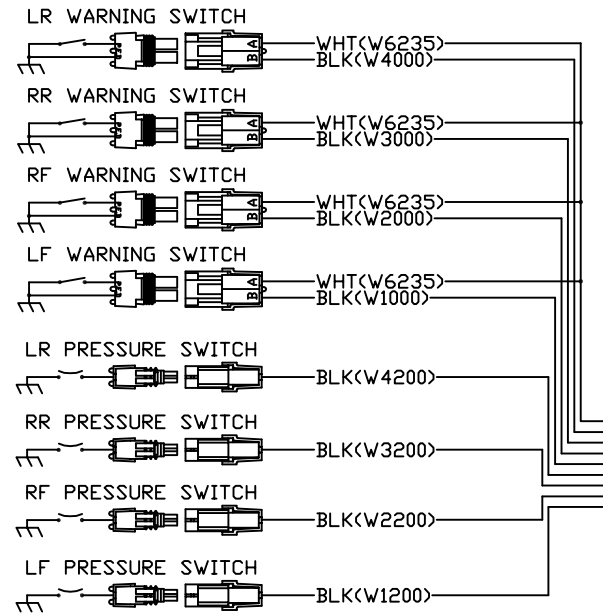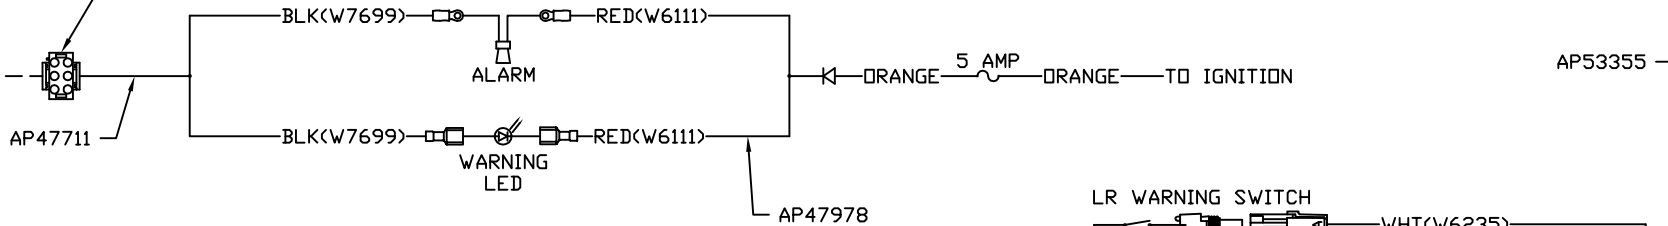


RED(W6800)  
SHIELD  
YELLOW





WHT(W6230)  
GREEN

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

MP91115 C  
05MAR15

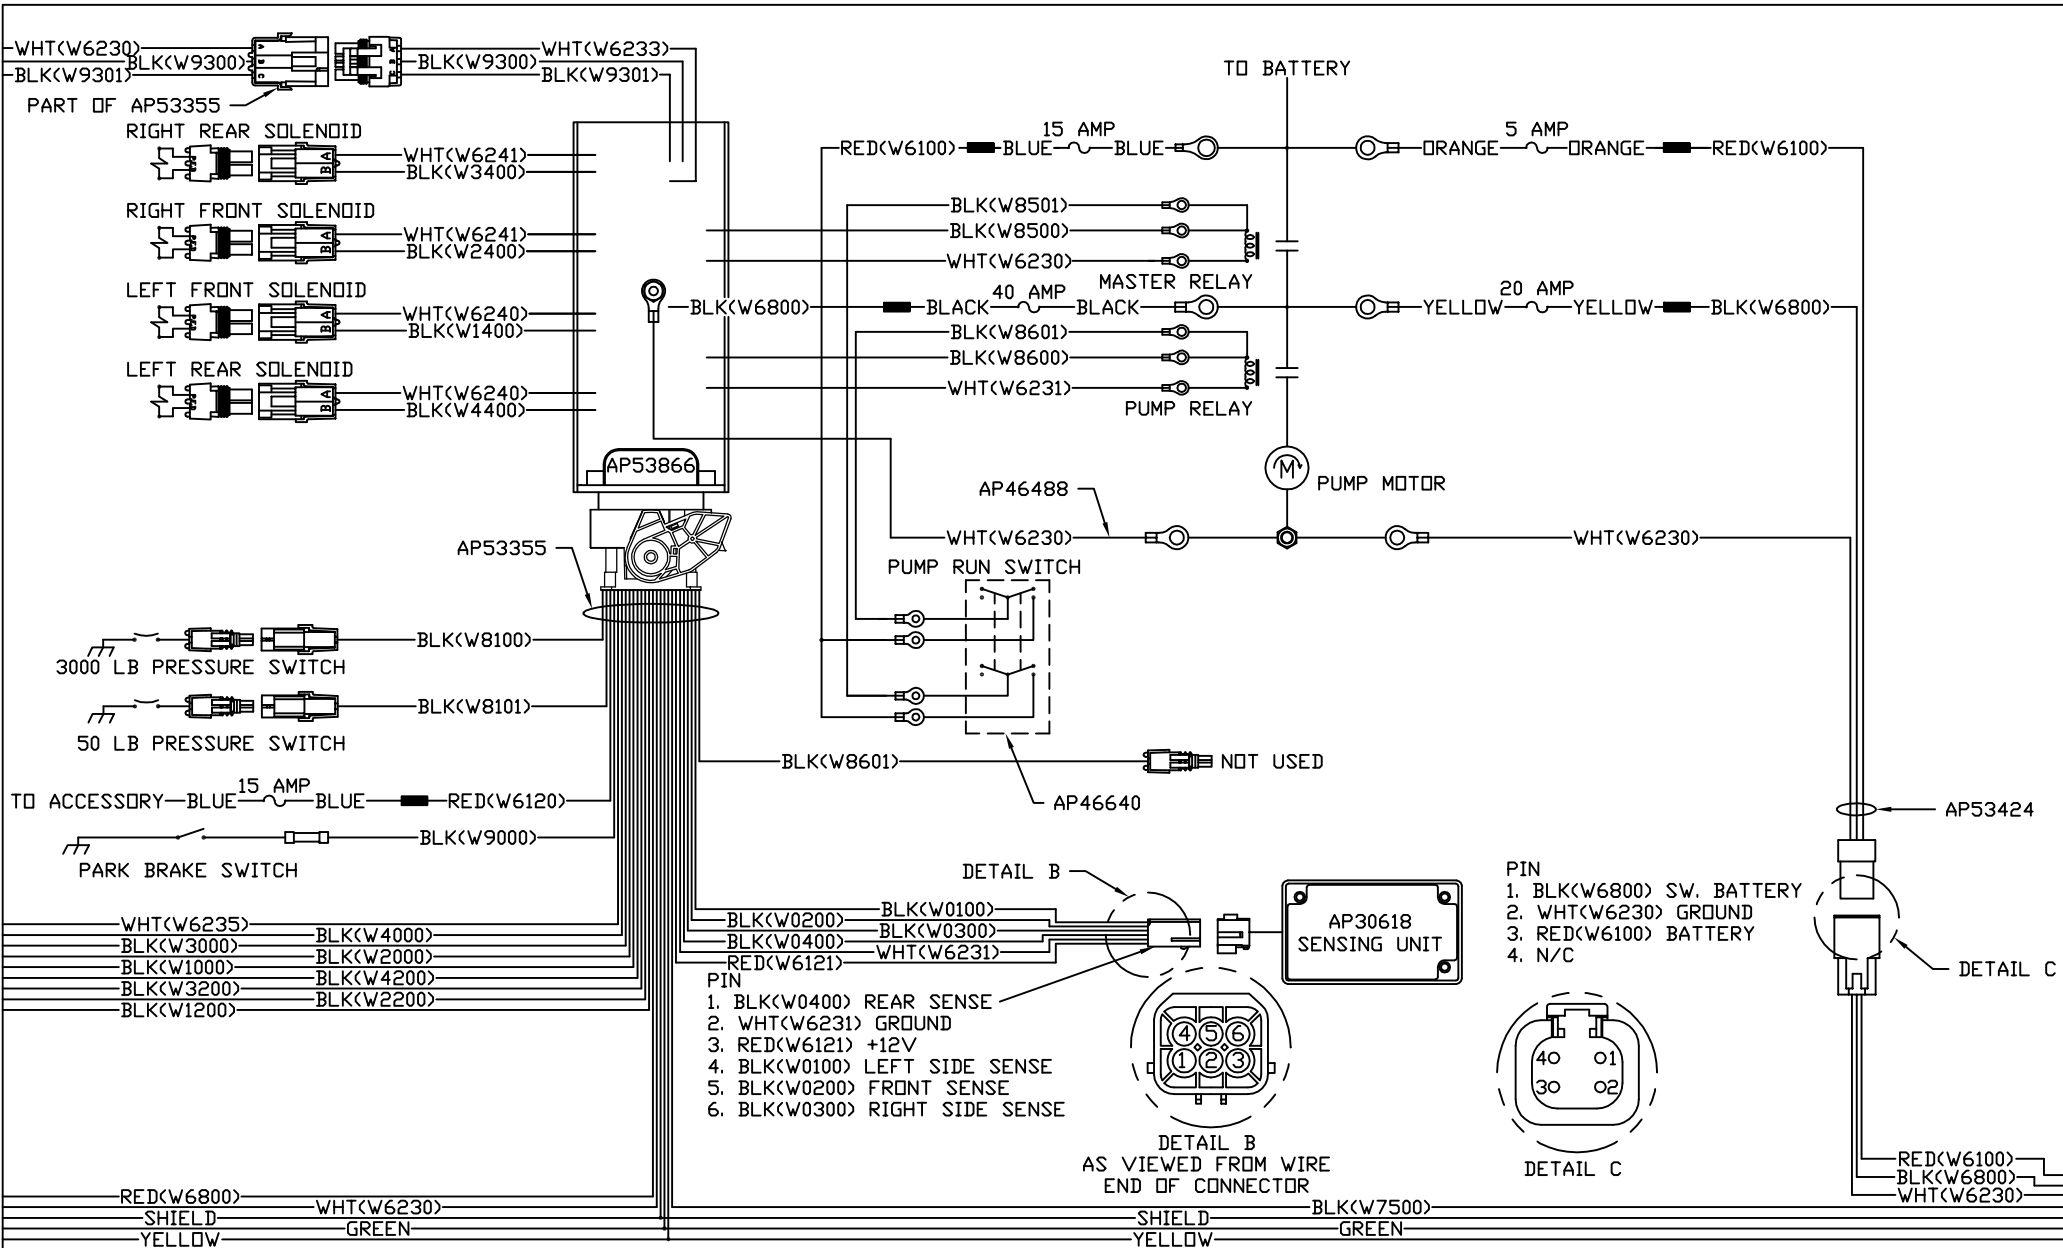

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

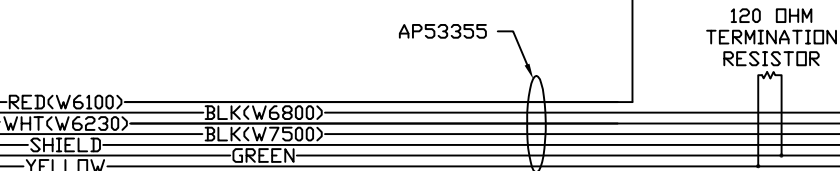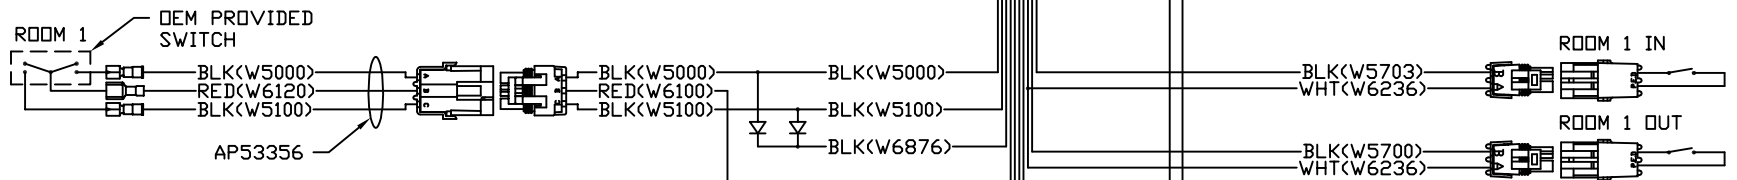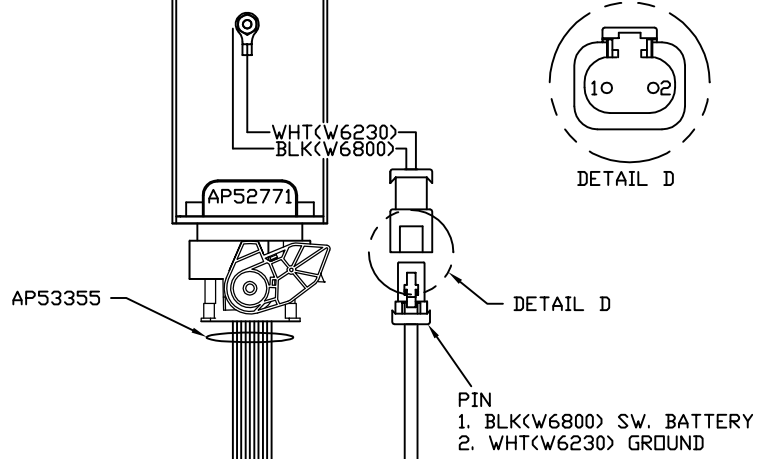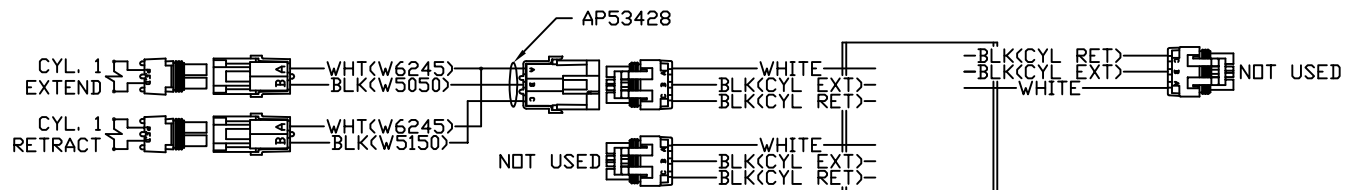

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.